REMO30 (Head)

System	REMO30 (Remote head) ※ Including AP-5 (Adapter plate)		
Payload	5kg / 11lb	Max. rotation speed	Fast : 9 sec/360° , Slow : 51 sec/360° (Pan & Tilt)
Max width	250 mm / 9.8"		
Weight	4.5 kg / 10 lb (Including bowl clamp)	Radius of tilt rotation	Max. R340 mm
Positioning range for camera	① 80 mm (AP-5 : Sliding range of sliding plate)	Radius of pan rotation	R300 mm
	② 76 mm (Within the slot)	Tilt drive	On / Off select of tilt drive lever
	③ 115 mm (Weight 5 kg、CG140 mm of camera)	Operating temperature	-10 ℃ ～ 40℃
	※Center to tilt rotation : 15mm ～ 130mm	Operating humidity	Below 60%
	④ 35 mm (Lens offset)	Extendable cable	Standard 5 m, max. 30 m of 6 connected cables
	※Center to pan rotation : (In)10 mm ～ (out)25 mm	Head attachment	For both ϕ75 mm and Φ100 mm
Camera screw	Type : 1/4-20UNC screw with video pin	Interface	LANC connection
Spare screw	Type : 1/4-20UNC , 3/8-16UNC screws		BNC connection
	Equipped on the AP-5 (Beneath the sliding plate)		Control cable connection

Remarks

■Exterior Dimensions (mm)

■AP-5

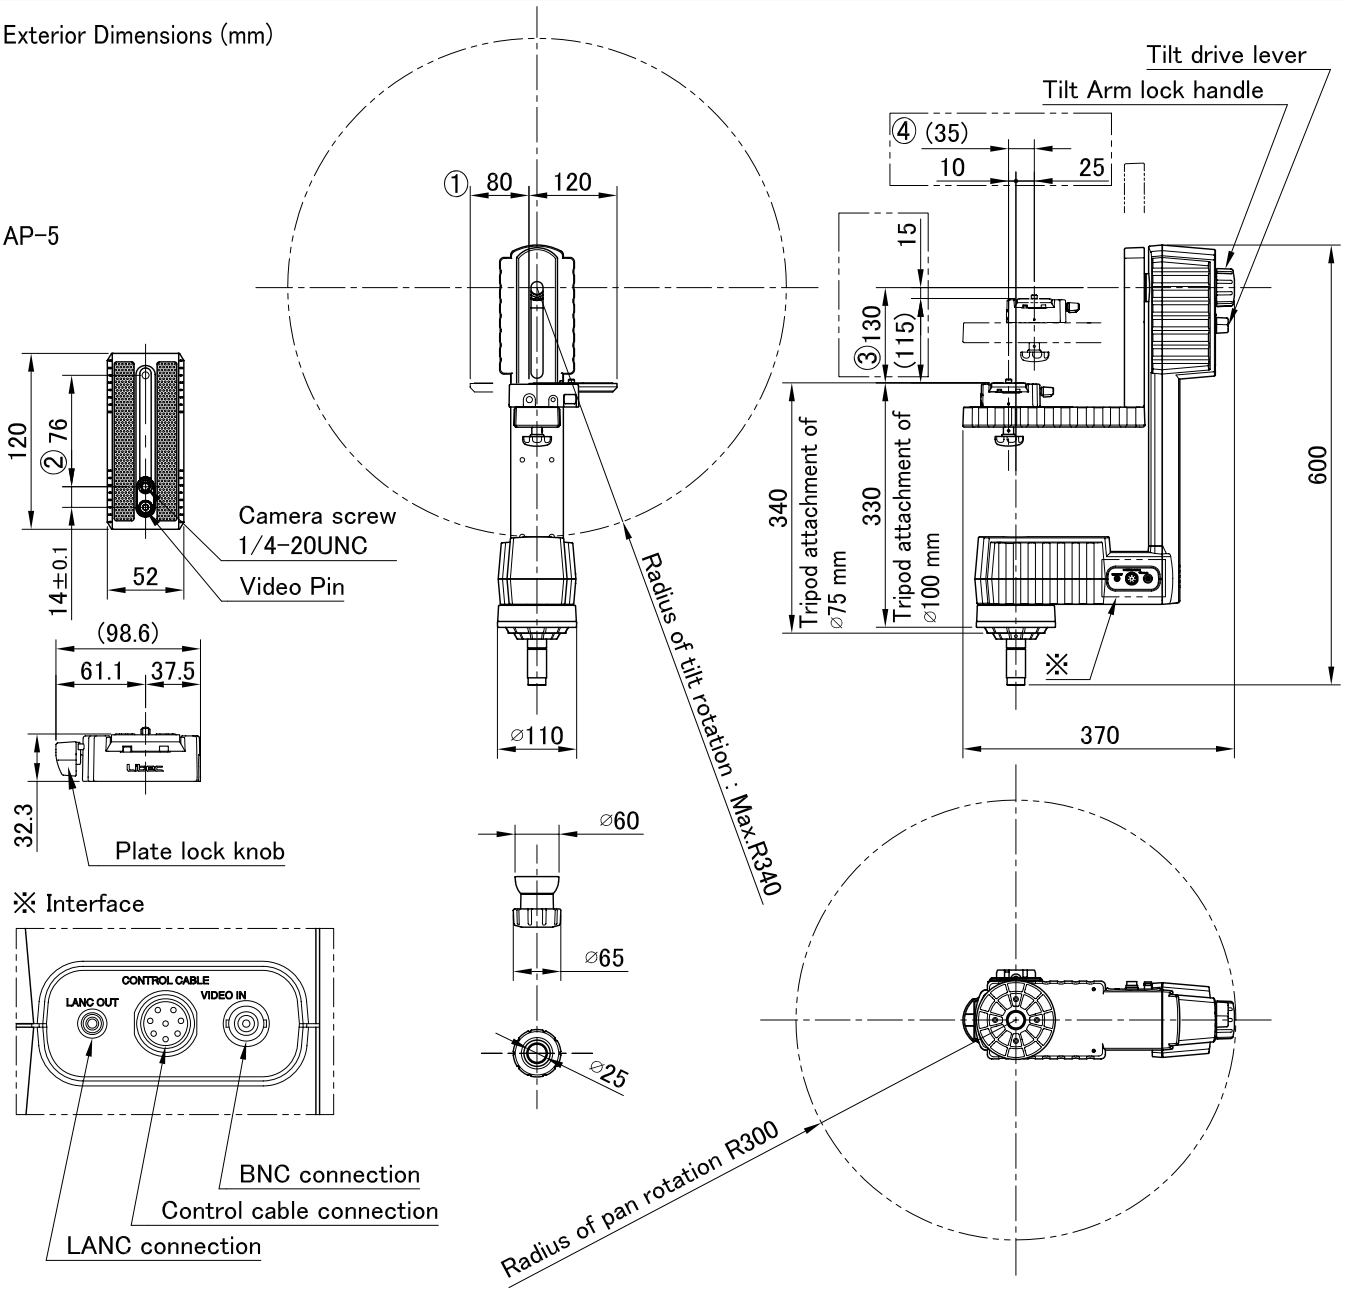

Manufacturer : HEIWA SEIKI KOGYO CO., LTD.
978-1, Nishibukuro, Yashio-City, Saitama, 340-0833 Japan TEL . +81-48-995-1301 FAX . +81-48-997-0804 http://www.libec-global.com

1501
DWG.NO. : 50-10022-E(1)